

静電気モニターリングシステム

6.1

春日電機

PC

8

「

」

8

が

4

()

が

」


」

5

()

が


8

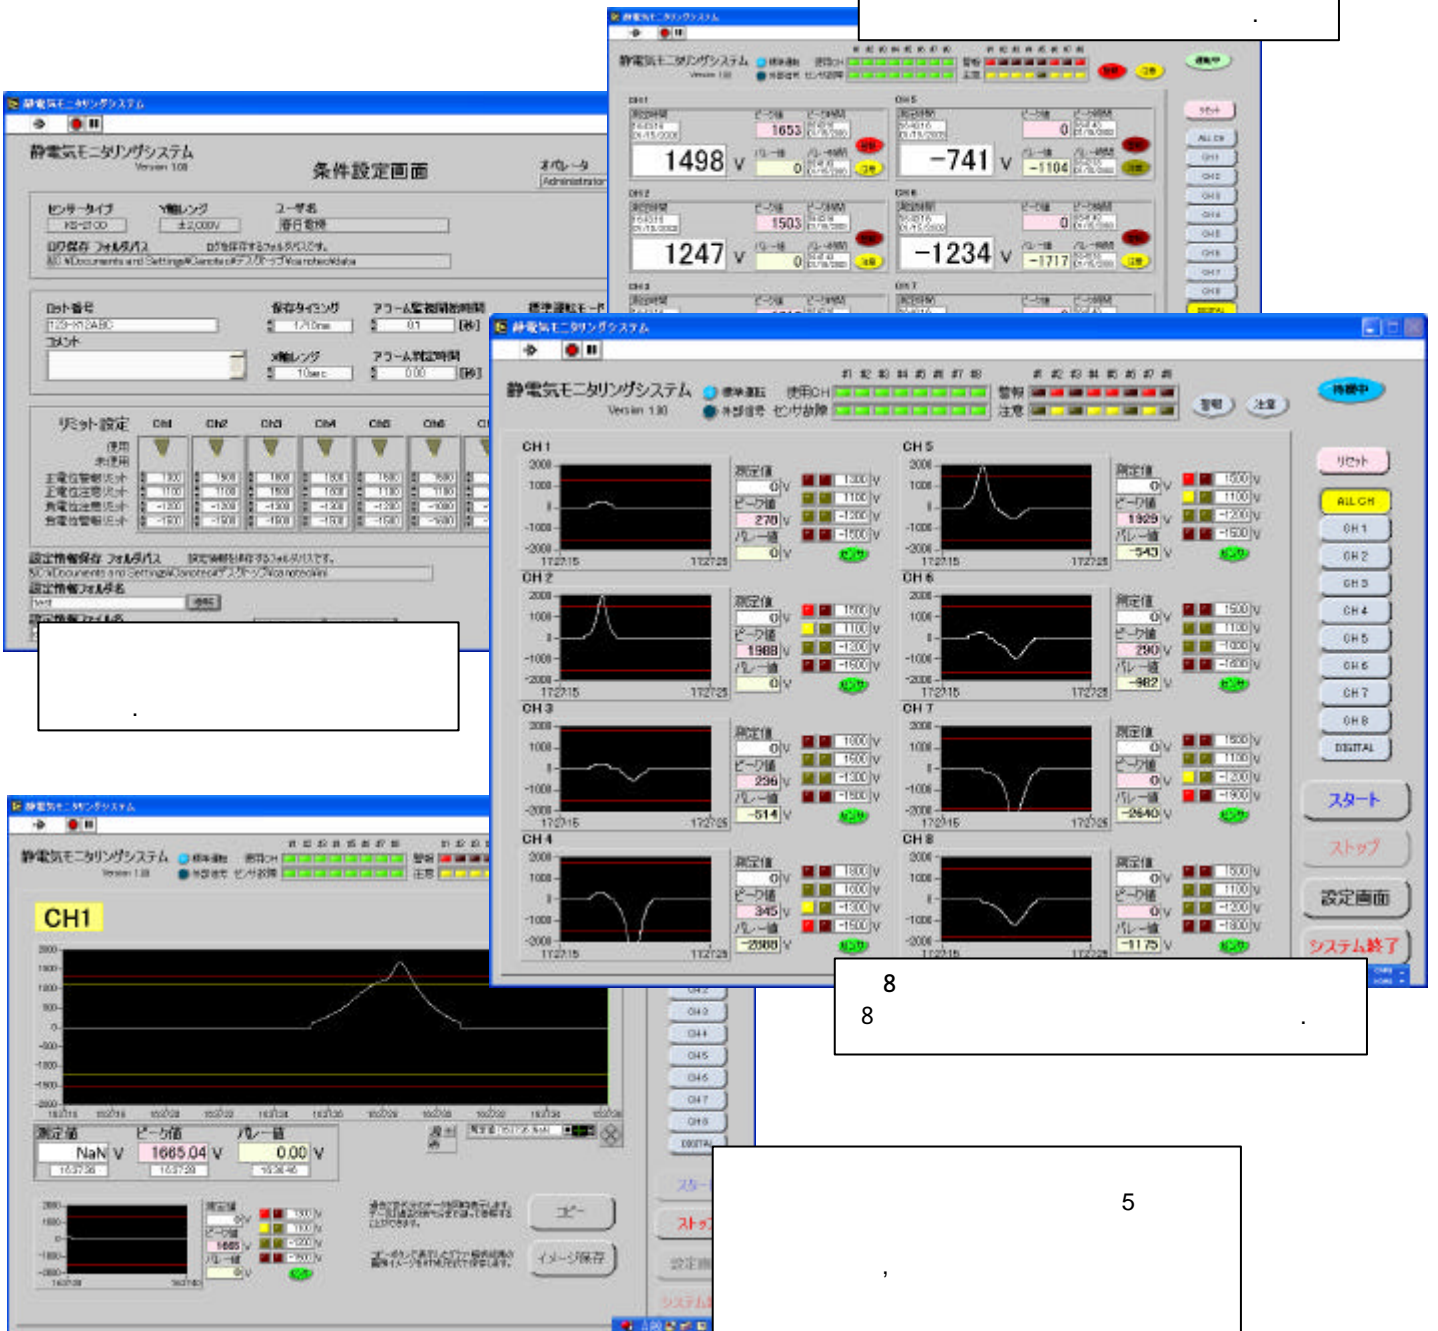

5



春日電機株式会社

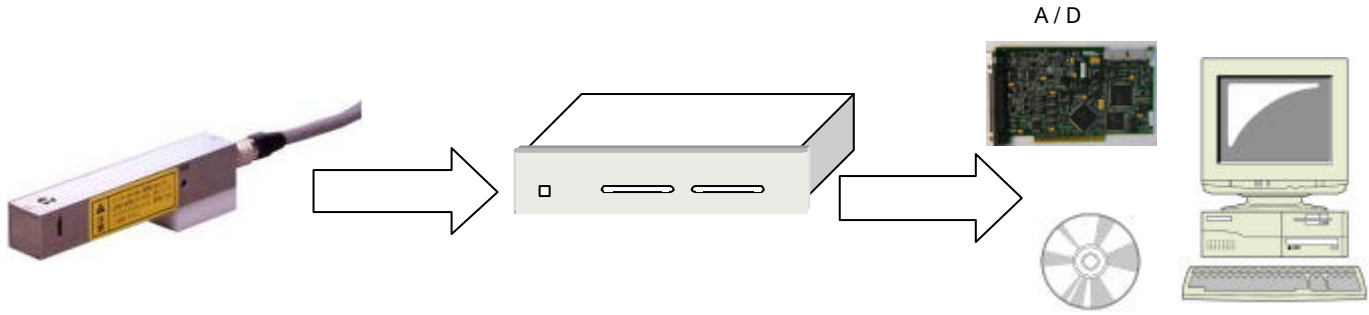

()

	KS-2100 (8)	春日電機()製
	MTB-1108 (8)	春日電機()製,
		春日電機()製,
A/D	PCI - 6025E	日本 製
		春日電機()製
	DOS -V	

()

	KS-2001 (8台)	春日電機()製
	KS-300A	春日電機()製,
	MTB-2108EX (8)	春日電機()製,
		春日電機()製,
A/D	PCI - 6025E	日本 製
		春日電機()製
	DOS -V	

CPU Pentium 2.4GHz
 OS Windows 2000 Professional
 RAM 256M
 HD 40G
 XGA (1024x768)

* , 32bit PCI 가 가 PC . (, Low Profile PC 가)

±20kV
 ±2kV
 ±5V (at±20kV, or±2kV)
 10sec., 60sec., 600sec. (가)
 Max1000point/sec.
 0.2sec.
 1sec., 10sec., 60sec., 300sec. (가)
 1sec., 10sec., 60sec. 1
 60sec., 300sec. 24

Windows XP Professional Microsoft Corporation
 LabVIEW6.1 National Instruments Corporation
 Intel Pentium Intel Corporation

春日電機株式會社
DAIN C & T CO., LTD.
 13-19, 401
 Tel : 02-761-7701 Fax : 02-761-7679



ISO9001
 Certified